


# Jefferson Electric

## ENCAPSULATED TRANSFORMERS

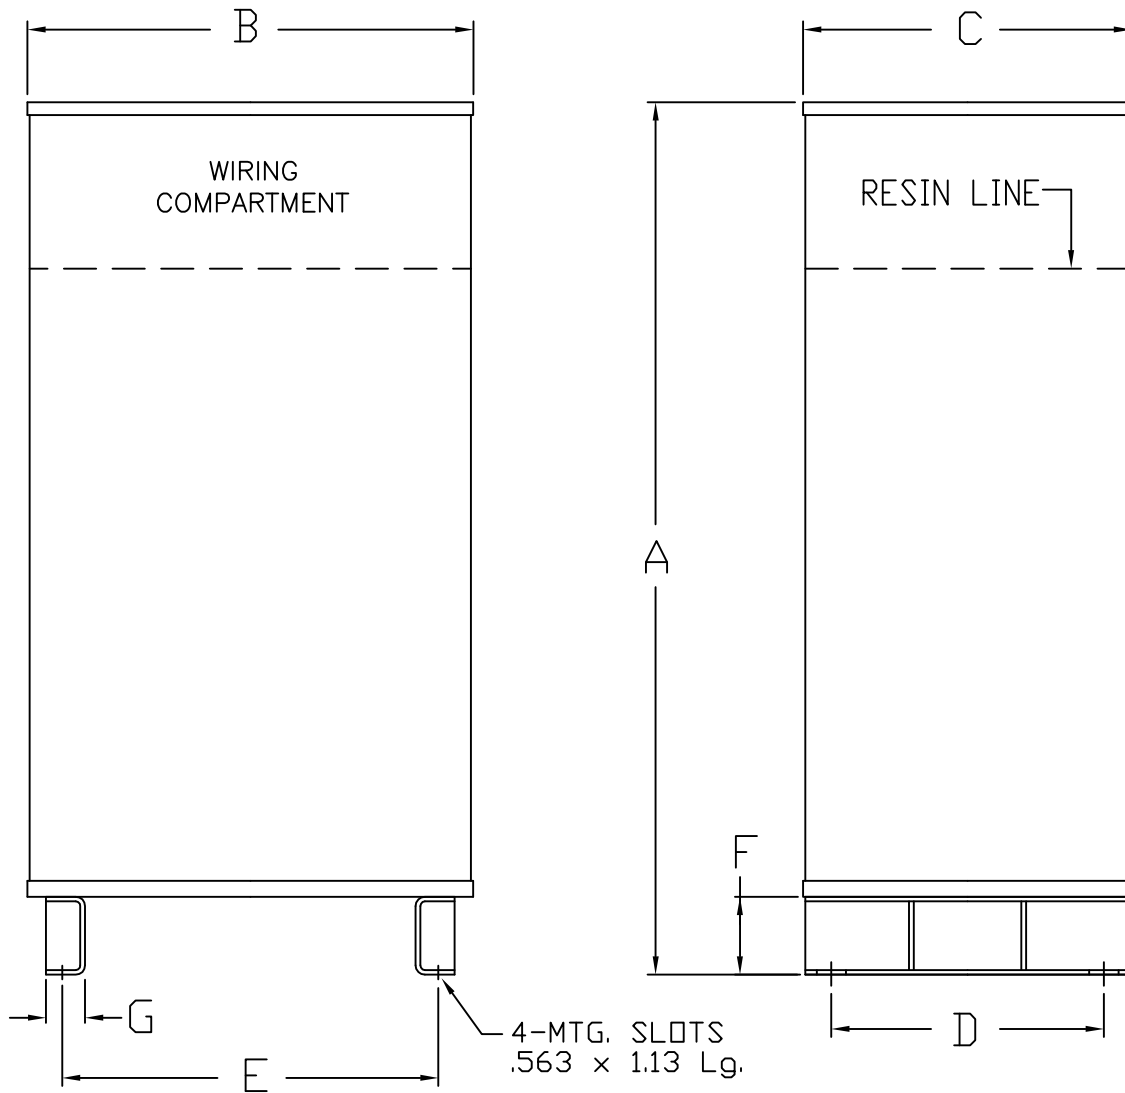

KVA	TEMP. RISE C°	NET WT. LBS.	HOUSING DIMENSIONS										
			A	B	C	D	E	F	G				
30	135	875	33.00	23.00	9.50	7.00	20.50	3.00	1.50				
45	135	980	36.00	25.00	12.50	8.50	21.75	3.00	1.50				
75	135	1100	37.00	25.00	12.50	10.50	22.50	3.00	1.50				

### NOTES:

- ALL UNITS ARE UL LISTED AND DESIGNED IN ACCORDANCE WITH ANSI, NEMA, AND CSA STANDARDS.
- THESE TRANSFORMERS UTILIZE A UL RECOGNIZED 180°C INSULATION SYSTEM, TEMPERATURE RISE AS INDICATED IN THE TABLE.
- TRANSFORMERS ARE ENCAPSULATED WITH ELECTRICAL GRADE RESIN IN A NEMA 3R-RATED ENCLOSURE. BUILT IN ACCORDANCE WITH NEMA, ANSI, UL, AND CSA STANDARDS.
- PAINT COLOR IS ANSI #61 GRAY.



GENERAL PURPOSE TRANSFORMERS  
THREE-PHASE, 600 VOLTS CLASS, 60 HZ.  
ALUMINUM WINDING ENCAPSULATED

PCD 413-FIGURE-21

REV.  
B