


STANDARD ENCLOSURE AND MOUNTING DIMENSIONS

General Purpose Transformer, NEMA 3R, three phase, 600V, 135°C rise

General Specifications

Type:	Encapsulated
Temp Rise:	135°C
Windings:	Aluminum or Copper
Resin:	Industrial grade, UL and CSA approved
Efficiency:	Exempt
Knockouts:	1.13" hole for 3/4" conduit 1.375" hole for 1" conduit Single or dual knockouts as indicated

Measurements in inches/pounds below;
metric dimensions on other side.

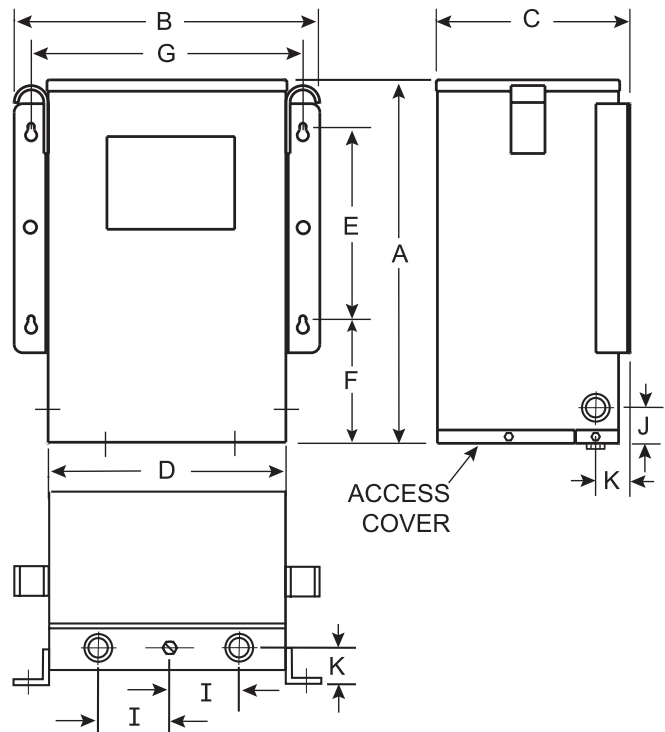

Dimensions in inches

kVA	Net Wt (lbs)	A	B	C	D	E	F	G	H (conduit)	I	J	K
3	82	13.1	15.1	8.1	12.1	5.25	5.5	13.6	3/4" & 1"	3.0	1.75	2.0
6	119	13.1	15.1	8.1	12.1	5.25	5.5	13.6	3/4" & 1"	3.0	1.75	2.0
9	157	15.1	19.0	9.1	16.0	8.25	5.1	17.5	3/4" & 1"	4.0	1.75	2.0
15	228	15.1	19.0	9.1	16.0	8.25	5.1	17.5	3/4" & 1"	4.0	1.75	2.0

Housing dimensions subject to change without notice. Consult factory where dimensions are critical.

NOTES:

- All units are UL listed and are designed in accordance with ANSI C89.2 and NEMA ST-20 standards
- These transformers utilize a UL recognized 180°C insulation system, temperature rise as indicated
- Transformers are encapsulated with electrical grade resin in a NEMA 3R-rated enclosure
- Units are built in accordance with NEMA, ANSI, UL and CSA standards
- Transformer type exempt from DOE & NRCan efficiency standards
- Connection by wire
- Shield optional
- Paint color is ANSI #61 Gray
- Net Weights are approximate



800-892-3755

PCD 413-FIGURE-4



jeffersonelectric.com



bemag.ca


STANDARD ENCLOSURE AND MOUNTING DIMENSIONS

General Purpose Transformer, NEMA 3R, three phase, 600V, 135°C rise

General Specifications

Type:	Encapsulated
Temp Rise:	135°C
Windings:	Aluminum or Copper
Resin:	Industrial grade, UL and CSA approved
Efficiency:	Exempt
Knockouts:	2.87 cm hole for 3/4" conduit 3.49 cm hole for 1" conduit Single or dual knockouts as indicated

Measurements in centimeters/kilograms below;
inches/pounds dimensions on other side

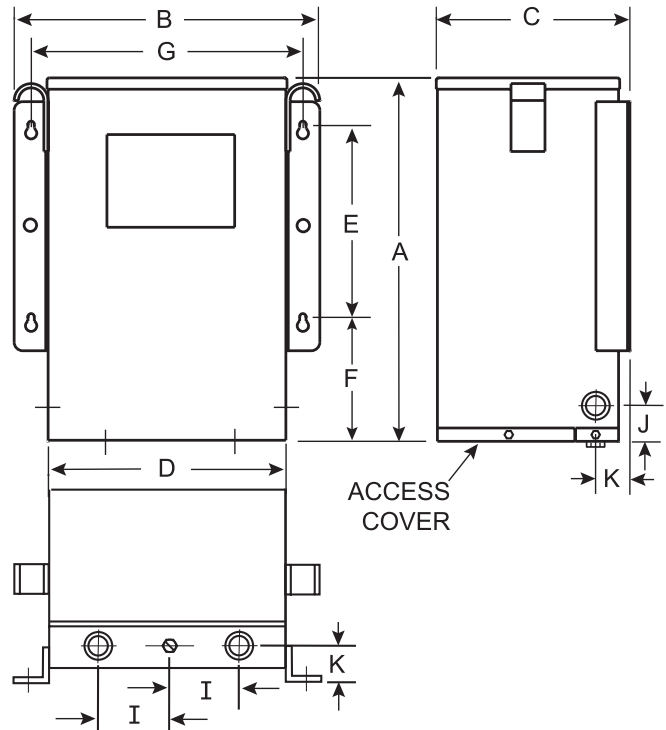

Dimensions in centimeters

kVA	Net Wt (kg)	A	B	C	D	E	F	G	H (conduit)	I	J	K
3	37.2	33.3	38.4	20.6	30.7	13.3	14.1	34.5	3/4" & 1"	7.6	4.4	5.1
6	54.1	33.3	38.4	20.6	30.7	13.3	14.1	34.5	3/4" & 1"	7.6	4.4	5.1
9	71.2	38.4	48.3	23.1	40.6	21.1	13.1	44.5	3/4" & 1"	10.2	4.4	5.1
15	103.4	38.4	48.3	23.1	40.6	21.1	13.1	44.5	3/4" & 1"	10.2	4.4	5.1

Housing dimensions subject to change without notice. Consult factory where dimensions are critical.

NOTES:

- All units are UL listed and are designed in accordance with ANSI C89.2 and NEMA ST-20 standards
- These transformers utilize a UL recognized 180°C insulation system, temperature rise as indicated
- Transformers are encapsulated with electrical grade resin in a NEMA 3R-rated enclosure
- Units are built in accordance with NEMA, ANSI, UL and CSA standards
- Transformer type exempt from DOE & NRCan efficiency standards
- Connection by wire
- Shield optional
- Paint color is ANSI #61 Gray
- Net Weights are approximate



800-892-3755

PCD 413-FIGURE-4



jeffersonelectric.com



bemag.ca